

### External Leak Sealer Paste 504384

#### Specification


Colour Code	Green
Tube Dimensions	140(h) x 35(w) x 25(d) mm
Tube Volume	1 Litre
Tube Weight	50g
Paste Colour	White
Dosing Amount	-
Shelf Life	-

#### Features

Usage	For sealing small leaks on all types of joints and fittings. Ideal for temporary repairs. Cures in 1 Hour
Dose Rate	Please see next page
Health & Safety	Please see next page



#### Key Features + Benefits

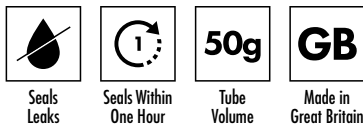

#### Certifications + Accreditations

#### Scalemaster Ltd

Emerald Way, Stone Business Park, Stone, Staffordshire ST15 0SR. Technical Helpline: 01785 811636 Email: info@scalemaster.co.uk

All information on the data sheet is correct at the time of publication. All measurements are approximate and subject to standard tolerances.

### External Leak Sealer Paste 504384

#### Features

##### Dose Rate

Remove cap and pierce seal. Reduce system water pressure to zero and/or drain system. Clean both joint surfaces to ensure good adhesion. Apply a small amount of sealant to one surface only. Sealant can be moulded within 5 minutes of application using a knife dipped in soapy water. Reassemble joint, allow sealant to cure before reinstating system pressure. Replace cap immediately after use.

**Precautions** – Not suitable for use with bitumen or felt. Avoid contact with chrome-plated and gold-plated decorative fittings.



##### Health & Safety

Causes skin irritation. Causes serious eye damage. Keep out of reach of children. Avoid contact with skin and eyes. Use only in well ventilated areas.

Wear protective gloves/protective clothing/eye protection/face protection.

**If in eyes:** Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do. Continue rinsing.

Immediately call a Poison Centre/Doctor.

**If skin irritation occurs:** get medical advice/attention.

Dispose of contents/container in accordance with national regulations.