


CLOSE COUPLED WC

Please retain for future reference


The cistern flush valve comes fitted with a flow restrictor which should be removed for optimum operation of this WC unit. Please follow the steps below before commencing with use of the WC.

1

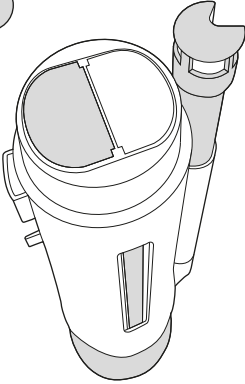


Remove the lid from the cistern and identify the flush valve.

2

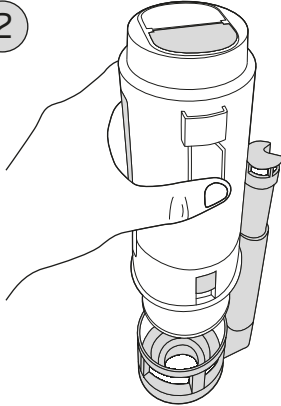


Rotate the flush valve to unlock and lift away from its cradle.

3

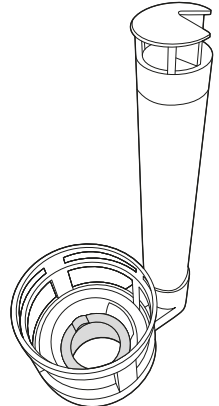


The flow restrictor will now be visible.

4

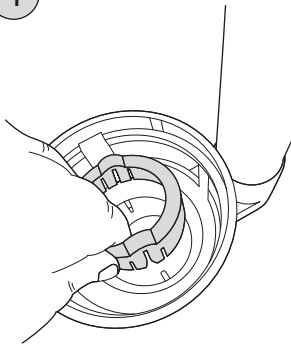


The flow restrictor will lift straight out of the flush valve cradle.

5

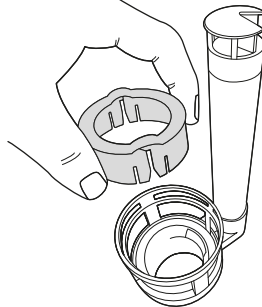

Remove the flow restrictor from the cradle.

6

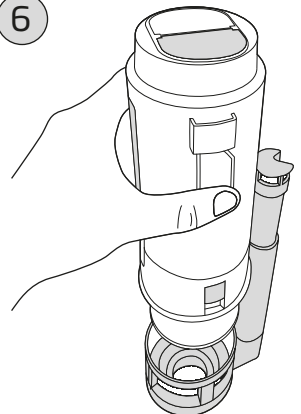

Replace the flush valve and ensure to rotate to lock into position.