

Hemsworth Dual Control Shower (Rigid Riser) INSHDEV002



Specification

Finish	Chrome
Dimensions	976(h) x 200(w) x 115(d) mm
Weight	3.09kg
Body Material	Brass
Hose Material	-
Hose Length	-
Hose Connection	-
Hose Bore	-
Overhead	Fixed
Overhead Material	Metal
Overhead Size	105mm
Shower Arm Length	437mm
Handset Material	-
Handset Functions	-
Handset Rub Clean	-
Valve Inlet Centres	110-155mm
Valve Connection	15mm
Valve Handle Material	Mazak
Min Operating Pressure	0.1 Bar
Max Operating Pressure	5 Bar
Max Static Pressure	10 Bar
Max Operating Temperature	80°C
Thermostatic Safety Stop Setting	42°C
Flow Restrictor	Yes

Flow Rates


Pressure	0.2	0.5	1	3
L/min	7.9	12.5	17.7	30.6

All Pressures in Bar. All flow in L/Min. Dimensions supplied are nominal and subject to tolerance. Inclusion or restrictors (sold separately unless stated) will affect flow rate result. Performance details are based on trials under test conditions and for guidance only. The Company reserves the right to change product specification without prior notice.

Features

Kit	Rigid riser kit includes traditional shower rose
Flow	Supplied with 1 x 7l/m and 1 x 5l/m flow limiters

Key Features + Benefits

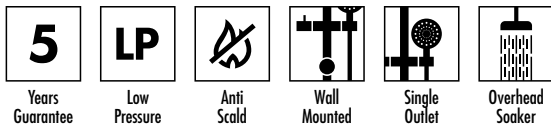

Certifications + Approvals

Flow Rate – 7.9 l/min

Tested at 0.2 Bar

Hemsworth Dual Control Shower (Rigid Riser) INSHDEV002

