

### Hemsworth Dual Control Shower (Diverter + Rigid Riser) INSHDEV003



#### Specification

Finish	Chrome
Dimensions	1290(h) x 200(w) x 138(d) mm
Weight	2.96kg
Body Material	Brass
Hose Material	-
Hose Length	-
Hose Connection	-
Hose Bore	-
Overhead	Fixed
Overhead Material	Metal
Overhead Size	145mm
Shower Arm Length	560mm
Handset Material	Brass
Handset Functions	Single Function
Handset Rub Clean	No
Valve Inlet Centres	136-158mm
Valve Connection	15mm
Valve Handle Material	Mazak
Min Operating Pressure	0.1 Bar
Max Operating Pressure	5 Bar
Max Static Pressure	10 Bar
Max Operating Temperature	80°C
Thermostatic Safety Stop Setting	42°C
Flow Restrictor	Yes

#### Flow Rates


Pressure	0.2	0.5	1	3
L/min	5.1	10.3	15.6	11.6

All Pressures in Bar. All flow in L/Min. Dimensions supplied are nominal and subject to tolerance. Inclusion or restrictors (sold separately unless stated) will affect flow rate result. Performance details are based on trials under test conditions and for guidance only. The Company reserves the right to change product specification without prior notice.

#### Features

Kit	Traditional shower kit with external diverter, shower rose, rigid riser and handset
Flow	Supplied with 2 x 8l/m flow limiters

#### Key Features + Benefits

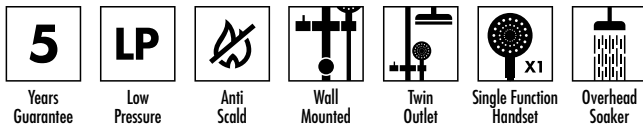

#### Certifications + Approvals

Flow Rate – 10.3 l/min

Tested at 0.5 Bar

### Hemsworth Dual Control Shower (Diverter + Rigid Riser) INSHDEV003

