

INSTINCT®



Corner Radiator Valves

handwheel & lockshield

corner radiator valves



DESIGN

INSTINCT® manual corner radiator valves are of durable construction giving dependable performance for building services and domestic applications.

The chrome plated bodies with chrome finish handwheel or lockshield cover is suitable for stylistic modern decors.

The valves are ideal for decorative radiators and towel rails with bottom connections in bathroom or similar heat emitters with bottom connections.

The tailpipes are connected to the bodies via a union joint.


The design of the bodies is ideal for concealed pipework embedded into a wall or through wall pipework.

The inlet connection to all valves is compression, for use with half hard R250 copper tube, and the outlet connection is a union tailpipe with 1/2" external pipe thread to BS EN 10266.


MATERIALS OF CONSTRUCTION

Body	Brass	BS EN 12164 CW617N
Union nut	Brass	BS EN 12164 CW617N
Tailpiece	Brass	BS EN 12164 CW614N
Olive	Brass	BS EN 12164 CW617N
Seals - 'O' rings	EPDM	
Stem	Brass	BS EN 12164 CW614N
Lockshield insert	Brass	BS EN 12164 CW614N

DIMENSIONS

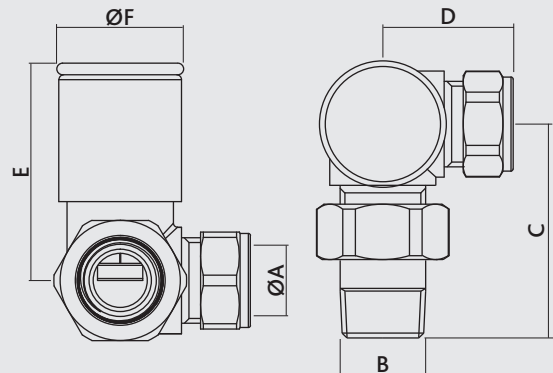

Prod Code	A	B	C	D	E	F
INST-AL029LC	15	R1½	52	31.9	53.1	31

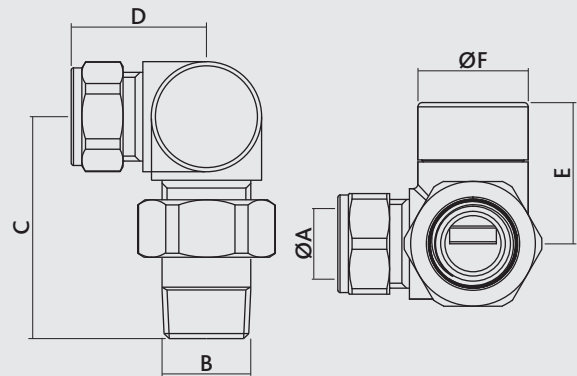

Prod Code	A	B	C	D	E	F
INST-AL029LC	15	R1½	52	31.9	33.3	26

TECHNICAL SPECIFICATION

Max. working pressure (static):	10 bar
Max. temperature:	100 °C
Medium:	water, glycol solution
Max percentage of glycol:	30%
Weight - handwheel & lockshield valves:	0.54 kg

Altecnic Ltd Mustang Drive, Stafford, Staffordshire ST16 1GW

T: +44 (0)1785 218200 E: sales@altecnic.co.uk

Registered in England No: 2095101

altecnic.co.uk

AL 330 27-02-19

E & O.E

© Altecnic Limited. 2019

ALTECNIC™

INSTINCT®