

Islay Twin Outlet Thermostatic Shower Valve + Kit INSIV1004P



Specification

Finish	Matt Black
Dimensions	870 / 1200(h) x 265(w) mm
Weight	4kg
Body Material	Brass
Hose Material	Smooth PVC
Hose Length	1500mm
Hose Connection	Nut / Cone
Hose Bore	8mm
Overhead	Adjustable
Overhead Material	Stainless Steel
Overhead Size	200mm
Shower Arm Length	330mm
Handset Material	ABS
Handset Functions	Three Function
Handset Rub Clean	Yes
Valve Inlet Centres	150mm
Valve Connection	15mm
Valve Handle Material	ABS
Min Operating Pressure	0.5 Bar
Max Operating Pressure	5 Bar
Max Static Pressure	10 Bar
Max Operating Temperature	85°C
Thermostatic Safety Stop Setting	38°C
Flow Restrictor	No

Flow Rates

Pressure	0.2	0.5	1	3
L/min	-	5.6	7.7	14.1

All Pressures in Bar. All flow in L/Min. Dimensions supplied are nominal and subject to tolerance. Inclusion or restrictors (sold separately unless stated) will affect flow rate result. Performance details are based on trials under test conditions and for guidance only. The Company reserves the right to change product specification without prior notice.

Certifications + Approvals

Flow Rate – 5.6 l/min




Tested at 0.5 Bar

2010037 – Oct 25



Valve Only

Key Features + Benefits

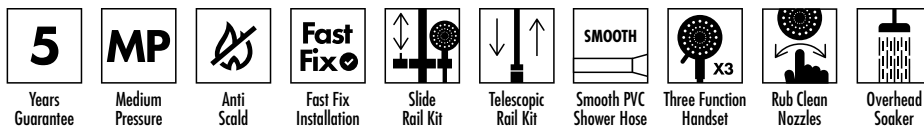

Highlife Bathrooms


Kelvin Industrial Estate, Unit A, 1 Young Place, East Kilbride, Glasgow G75 0TD. Technical Support – Tel: 01355 241111 Email: sales@highlifebathrooms.com

All information on the data sheet is correct at the time of publication. All measurements are approximate and subject to standard tolerances.

Technical Data Sheet | Shower

www.instinctproducts.co.uk

Islay Twin Outlet Thermostatic Shower Valve + Kit INSIV1004P

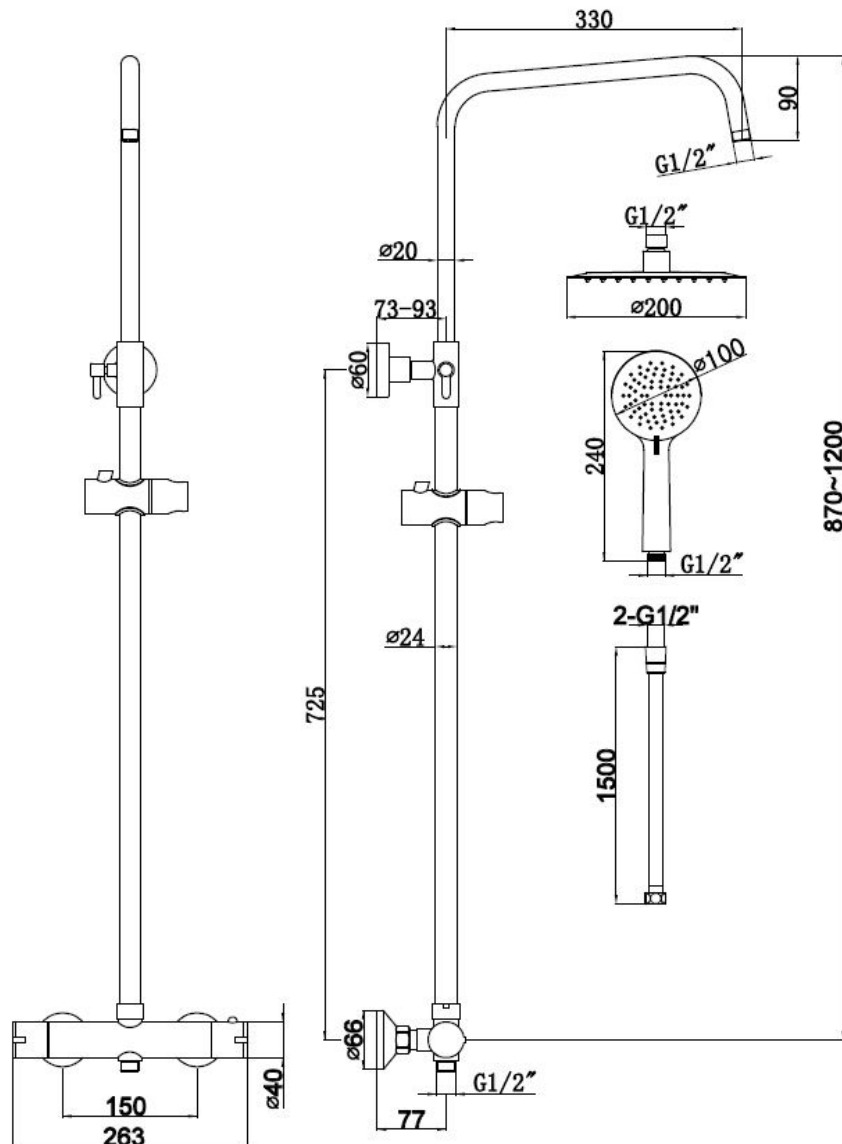

Highlife Bathrooms

Kelvin Industrial Estate, Unit A, 1 Young Place, East Kilbride, Glasgow G75 0TD. Technical Support – Tel: 01355 241111 Email: sales@highlifebathrooms.com

All information on the data sheet is correct at the time of publication. All measurements are approximate and subject to standard tolerances.