

### Keros Thermostatic Wall / Deck Bath + Shower Mixer INST13025CP



#### Specification

Finish	Chrome
Dimensions	700(h) x 263(w) mm
Weight	3.1 kg
Body Material	Brass
Hose Material	Smooth PVC
Hose Length	2000mm
Hose Connection	Nut / Cone
Hose Bore	10mm
Overhead	-
Overhead Material	-
Overhead Size	-
Shower Arm Length	-
Handset Material	ABS
Handset Functions	Three
Handset Rub Clean	Yes
Valve Inlet Centres	180mm/150mm Wall Mounted
Valve Connection	¾" / 15mm Wall Mounted
Valve Handle Material	Zinc
Min Operating Pressure	0.5 Bar
Max Operating Pressure	5 Bar
Max Static Pressure	10 Bar
Max Operating Temperature	85°C
Thermostatic Safety Stop Setting	38°C
Flow Restrictor	No

#### Flow Rates

Pressure	0.2	0.5	1	3
L/min	-	3.7	8	10.3

All Pressures in Bar. All flow in L/Min. Dimensions supplied are nominal and subject to tolerance. Inclusion or restrictors (sold separately unless stated) will affect flow rate result. Performance details are based on trials under test conditions and for guidance only. The Company reserves the right to change product specification without prior notice.

#### Certifications + Approvals

Flow Rate – 3.7 l/min




Tested at 0.5 Bar

Valve Only



Valve Only

#### Key Features + Benefits

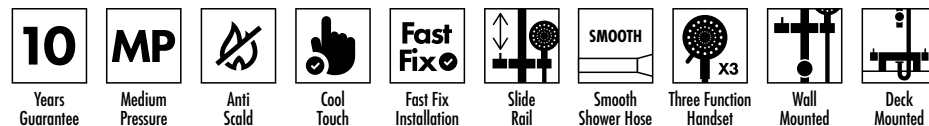


#### Highlife Bathrooms

Kelvin Industrial Estate, Unit A, 1 Young Place, East Kilbride, Glasgow G75 0TD. Technical Support – Tel: 01355 241111 Email: sales@highlifebathrooms.com

All information on the data sheet is correct at the time of publication. All measurements are approximate and subject to standard tolerances.

### Keros Thermostatic Wall / Deck Bath + Shower Mixer INST13025CP

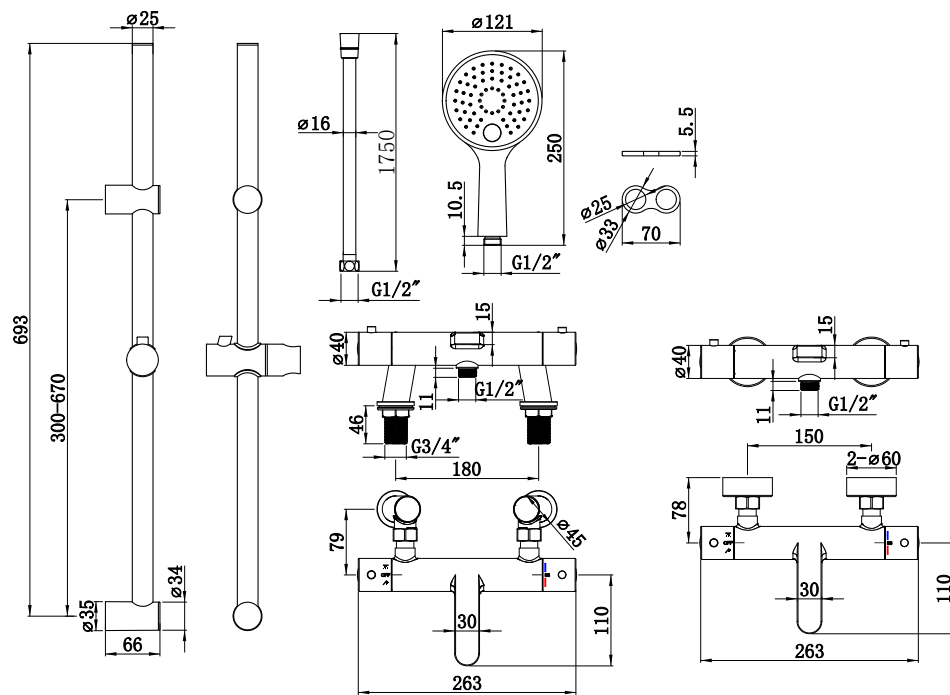

#### Spares

Flow Control Cartridge INST13217FV

Thermostatic Cartridge INST13217TC