


KISO

4E1022 – MONO BASIN

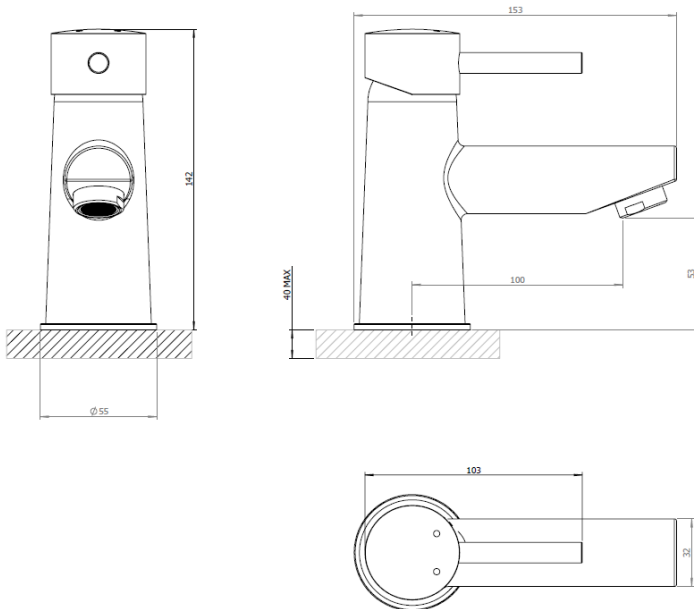

Specification

Finish	Chrome Plate
Body	Brass
Fittings	Metal plate, washer, stud & locking nut
Connection	M12 - DN8 Flexible hoses with 1/2" BSP threaded ends

Min dynamic pressure 0.1

Max dynamic pressure 6

Max static pressure 16

Max water temperature 60°C

Flow rates

Pressure	0.1	0.5	1	3
L/min	2.0	7.8	12	22

All Pressures are in Bar.

Dimensions supplied are nominal and subject to tolerance.

Inclusion of aerator (if supplied) or restrictors (sold separately unless stated) will affect flow rate result.

Performance details are based on trials under test conditions and for guidance only.

The Company reserves the right to change product specification without prior notice.

Features & Benefits



Guarantee



Low Pressure



Flexible Hose



Click Waste



Flow Straightener



Flow Aerator



Single Flow

Certifications



2004068 – Apr 25

Tested @ 0.2 bar