

Lisett Aluminium Cabinet

INST06079, INST06080, INST06081, INST06082



Specification

	INST06079 (Single Door)	INST06080 (Double Door)	INST06081 (Double Door)	INST06082 (Large Double Door)
Finish	Aluminium	Aluminium	Aluminium	Aluminium
Dimensions	664(h) x 481(w) x 127(d) mm	664(h) x 641(w) x 127(d) mm	664(h) x 841(w) x 127(d) mm	664(h) x 1041(w) x 127(d) mm
Weight	10.2kg	12.9kg	21.6kg	21.8kg
Lighting Type	LED	LED	LED	LED
Colour Changing Technology (CCT)	No	No	No	No
Switch Location	Front	Front	Front	Front
Surface/Recess Fitting	Surface/Recess	Surface/Recess	Surface/Recess	Surface/Recess
Carcass/Frame Construction Material	MFC	MFC	MFC	MFC
Carcass/Frame Finish	Black	Black	Black	Black
Number of Internal Shelves	Two	Two	Two	Two
Shelves (Fixed/Adjustable)	Adjustable	Adjustable	Adjustable	Adjustable
Door Hinge Handing	-	-	-	-
Glass Thickness	3mm	3mm	3mm	3mm

Features

Doors	Double sided mirror doors with heated demister pad
Lighting	Super bright LED lighting
Charging	Built-in charging socket for your shaver or toothbrush
Touch Controls	LEDs on/off with intuitive controls

FAQs

Please see following pages

Key Features + Benefits

5 Years Guarantee	2 Years Guarantee Electrical Components	 Charging Socket	IP44 IP44 Rated	LED LED Lighting	 Touch Controls	 Heated Demister Pad
 Internal Shelves	 Recessed or Surface Mounted	 Soft Close Doors				

Certifications + Accreditations

Roper Rhodes


Brassmill Lane Trading Estate, Bath, BA1 3JF. Technical Support – Tel: 01225 303 900 Email: sales@roperrhodes.co.uk

All information on the data sheet is correct at the time of publication. All measurements are approximate and subject to standard tolerances.


Lissett Aluminium Cabinet

INST06079, INST06080, INST06081, INST06082

Single Door (INST06079)

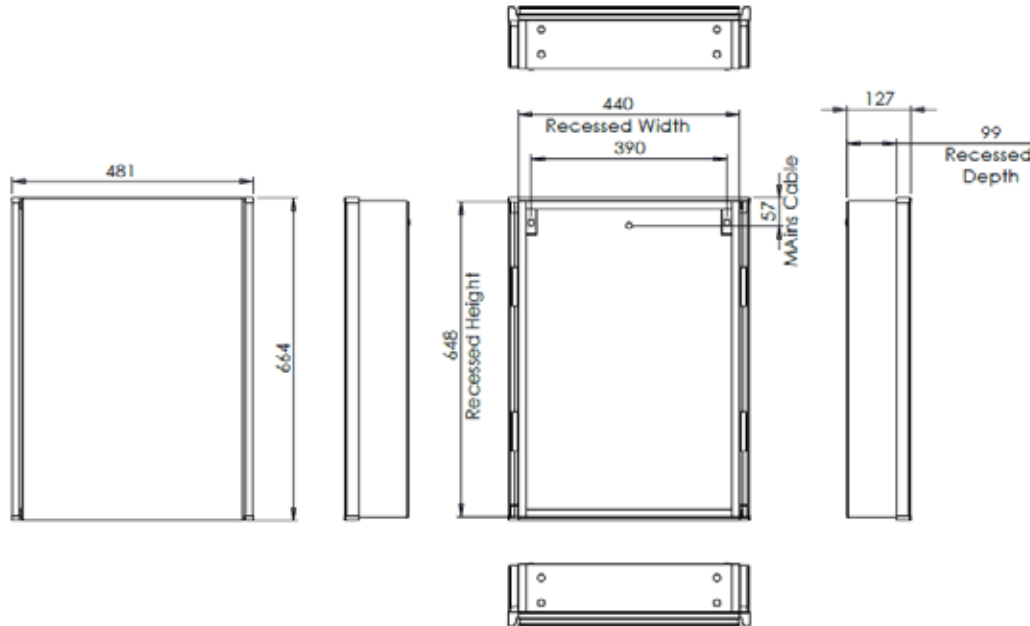

Double Door (INST06080)

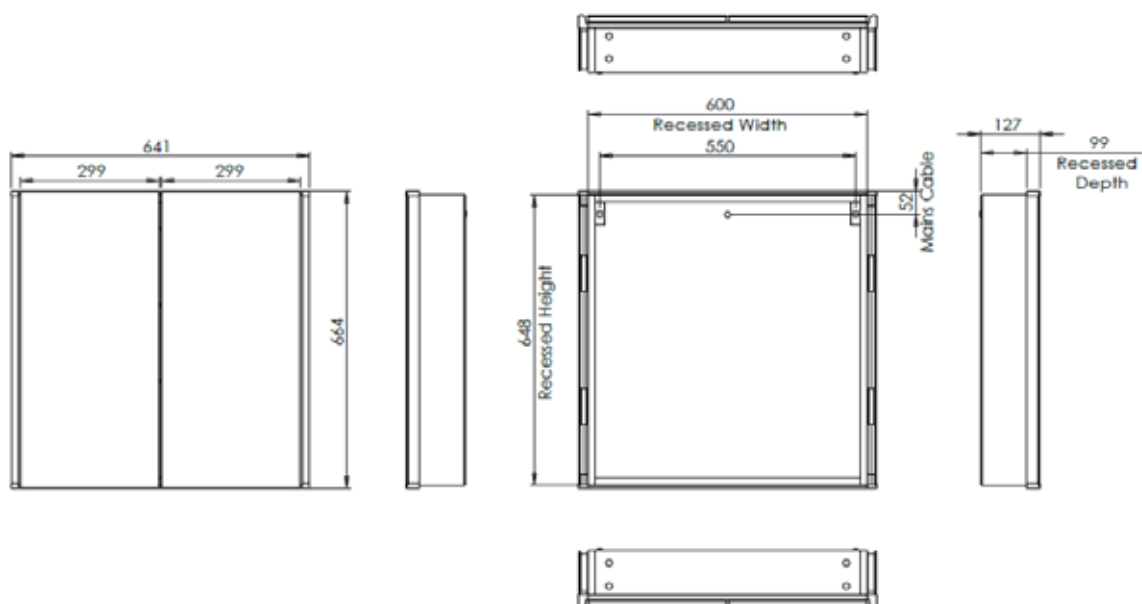

Roper Rhodes


Brassmill Lane Trading Estate, Bath, BA1 3JF. Technical Support – Tel: 01225 303 900 Email: sales@roperrhodes.co.uk

All information on the data sheet is correct at the time of publication. All measurements are approximate and subject to standard tolerances.


Lissett Aluminium Cabinet

INST06079, INST06080, INST06081, INST06082

Double Door (INST06081)

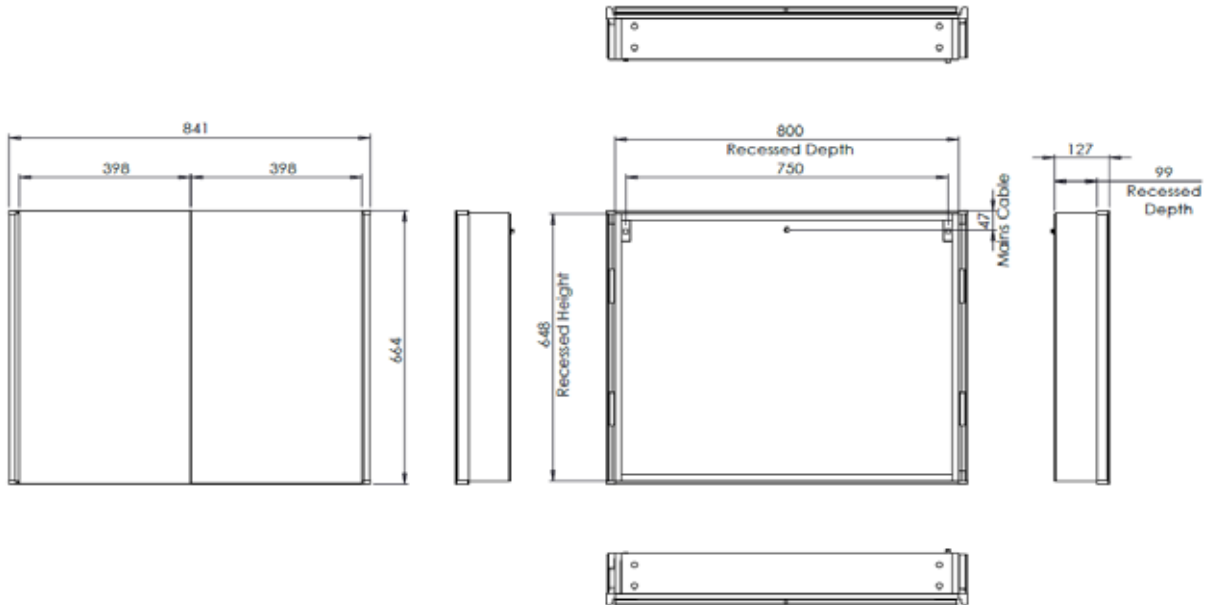

Large Double Door (INST06082)

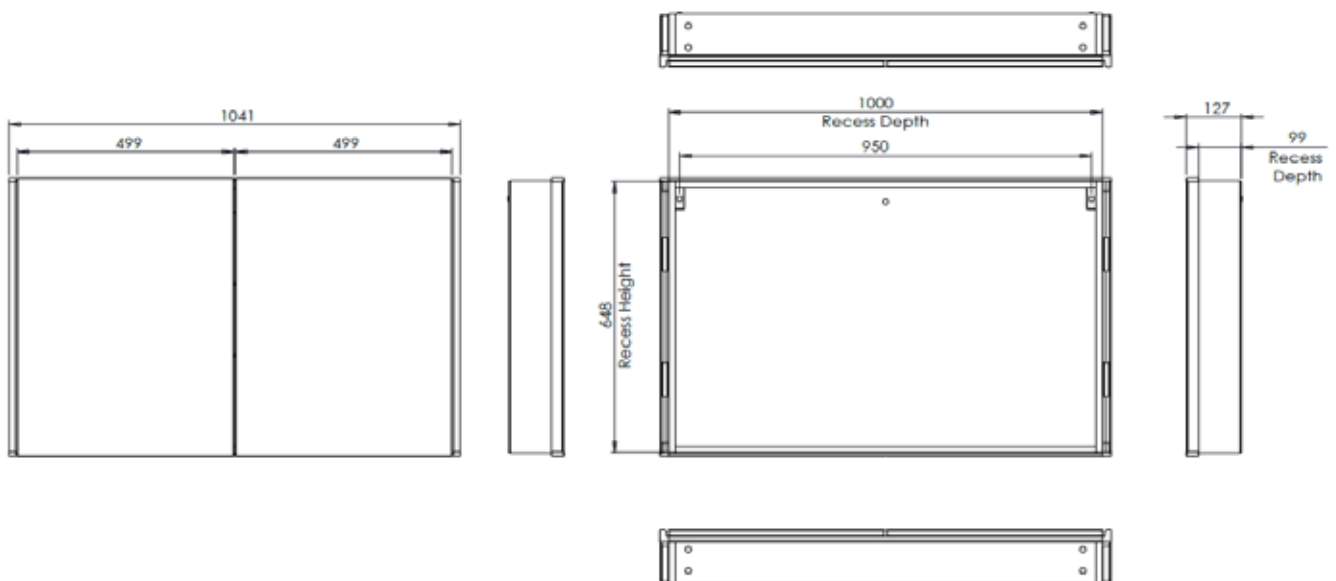

Lissett Aluminium Cabinet

INST06079, INST06080, INST06081, INST06082

FAQs

	INST06079 (Single Door)	INST06080 (Double Door)	INST06081 (Double Door)	INST06082 (Large Double Door)
Recess Dimensions	648(h) x 440(w) x 99(d) mm	648(h) x 600(w) x 99(d) mm	648(h) x 800(w) x 99(d) mm	648(h) x 1000(w) x 99(d) mm
Internal Dimensions	555(h) x 410(w) x 98(d) mm	555(h) x 570(w) x 98(d) mm	555(h) x 770(w) x 98(d) mm	555(h) x 970(w) x 98(d) mm
Shelf dimensions	95(h) x 404(w) x 5(d) mm	95(h) x 564(w) x 5(d) mm	95(h) x 764(w) x 5(d) mm	95(h) x 964(w) x 8(d) mm
Max shelf spacing	250mm	250mm	250mm	250mm
Distance between door hinges	370mm	370mm	370mm	370mm
Individual door dimensions	662(h) x 440(w) x 16(d) mm	662(h) x 298(w) x 16(d) mm	662(h) x 398(w) x 16(d) mm	662(h) x 498(w) x 16(d) mm
Door opening angle	90°	90°	90°	90°
Depth with door fully open	552mm	412mm	512mm	612mm
Hanging bracket centres	390mm	550mm	750mm	950mm
What is the thickness of the mirror glass?	3+3mm	3+3mm	3+3mm	3+3mm
What size fuse should I use?	Seek the advice of an electrician			
Where is the Touch Sensor located?	Lower right corner	Centre	Centre	Centre
Can the LED lighting be replaced?	No	No	No	No
How do I turn on the demister pad?	The demister pad will turn on when the LEDs are turned on			
Are illuminated cabinets supplied with mains cable?	All illuminated cabinets are supplied with a removeable 500mm mains cable. There is ample storage for excess cable in the back of the unit.			

Electrical Specification

	INST06079 (Single Door)	INST06080 (Double Door)	INST06081 (Double Door)	INST06082 (Large Double Door)
Input Voltage	220-240V 50Hz	220-240V 50Hz	220-240V 50Hz	220-240V 50Hz
Lamp Type	12V DC LED Lamp	12V DC LED Lamp	12V DC LED Lamp	12V DC LED Lamp
Total Wattage (LED + Demist)	27.0W	42.0W	42.0W	42.0W
Demist	15.0W	30.0W	30.0W	30.0W
Demist Size	200 x 300mm	150 x 400mm	200 x 300mm	200 x 300mm
LEDs	12.0W	12.0W	12.0W	12.0W
LED*	900lm	900lm	900lm	900lm
Energy Rating	F	F	F	F
CCT	6000K	6000K	6000K	6000K
CRI	85	85	85	85
IP Rating	IP44	IP44	IP44	IP44
Electrical Class	Class I	Class I	Class I	Class I

*The Lumen represents the output of the LED. This may vary depending on the diffuser material i.e., glass or acrylic.