

### Maxcel Dual Lever Exposed Maxi Valve + Kit INSMEV0003



#### Specification

Finish	Chrome
Dimensions	???(h) x ???(w) x ???(d) mm
Weight	??kg
Body Material	Brass
Hose Material	Plastic + Stainless Steel
Hose Length	1750mm
Hose Connection	Cone to Nut
Hose Bore	8mm
Overhead	-
Overhead Material	-
Overhead Size	-
Shower Arm Length	-
Handset Material	ABS
Handset Functions	Three Function
Handset Rub Clean	Yes
Valve Inlet Centres	136-158mm
Valve Connection	15mm
Valve Handle Material	Zinc Alloy
Min Operating Pressure	0.1 Bar
Max Operating Pressure	5 Bar
Max Static Pressure	10 Bar
Max Operating Temperature	80°C
Thermostatic Safety Stop Setting	42°C
Flow Restrictor	Yes

#### Flow Rates


Pressure	0.2	0.5	1	3
L/min	2.8	5.2	7.8	14.9

All Pressures in Bar. All flow in L/Min. Dimensions supplied are nominal and subject to tolerance. Inclusion or restrictors (sold separately unless stated) will affect flow rate result. Performance details are based on trials under test conditions and for guidance only. The Company reserves the right to change product specification without prior notice.

#### Features

Compatibility	Suitable for use with unvented water supplies, combi boilers, gravity and mains pressure systems
---------------	--

#### Key Features + Benefits

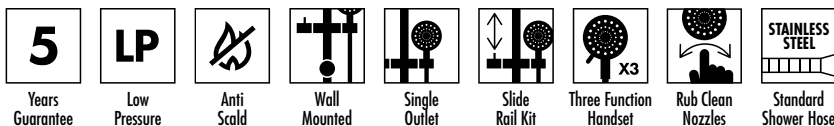

#### Certifications + Approvals

Flow Rate – 2.8 l/min



Tested at 0.2 Bar

### Maxcel Dual Lever Exposed Maxi Valve + Kit INSMEV0003

