





Milos LED Illuminated Mirror INST050131, INST050132

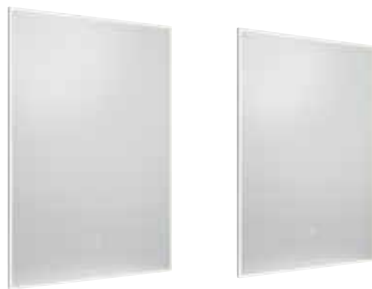

Key Features + Benefits

5 Years Guarantee	2 Years Guarantee Electrical Components	IP44 IP44 Rated	LED LED Lighting	CCT CCT Control Lighting	 Touch Controls
 Heated Demister Pad	 Portrait or Landscape Hanging				

Specification

	INST050131 (700x500mm)	INST050132 (800x600mm)
Finish	Aluminium	Aluminium
Dimensions	700(h) x 500(w) x 29(d) mm	800(h) x 600(w) x 29(d) mm
Weight	7.9kg	9.4kg
Lighting Type	LED	LED
Colour Changing Technology (CCT)	Yes	Yes
Switch Location	Front	Front
Surface/Recess Fitting	Surface	Surface
Carcass/Frame Construction Material	Aluminium	Aluminium
Glass Thickness	5mm	5mm

Features

Lighting	Dimmable LED perimeter lighting with CCT (Colour Changing Technology) control
Controls	Touch on/off
Hanging	Landscape or Portrait
Design	A sleek slim depth


FAQs

Please see following pages


Certifications + Accreditations

Milos LED Illuminated Mirror INST050131, INST050132

700 x 500mm (INST050131)

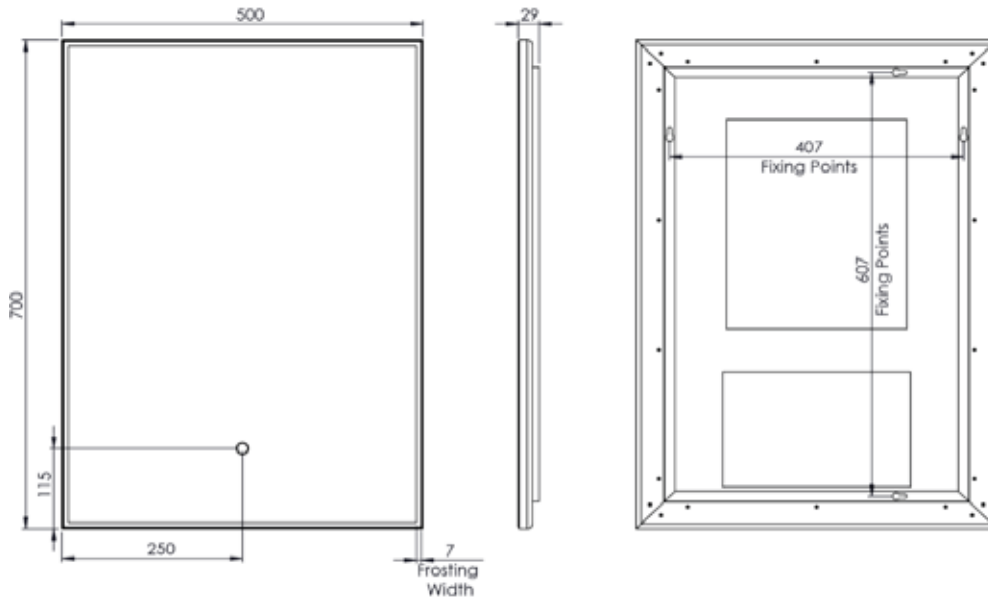

800 x 600mm (INST050132)

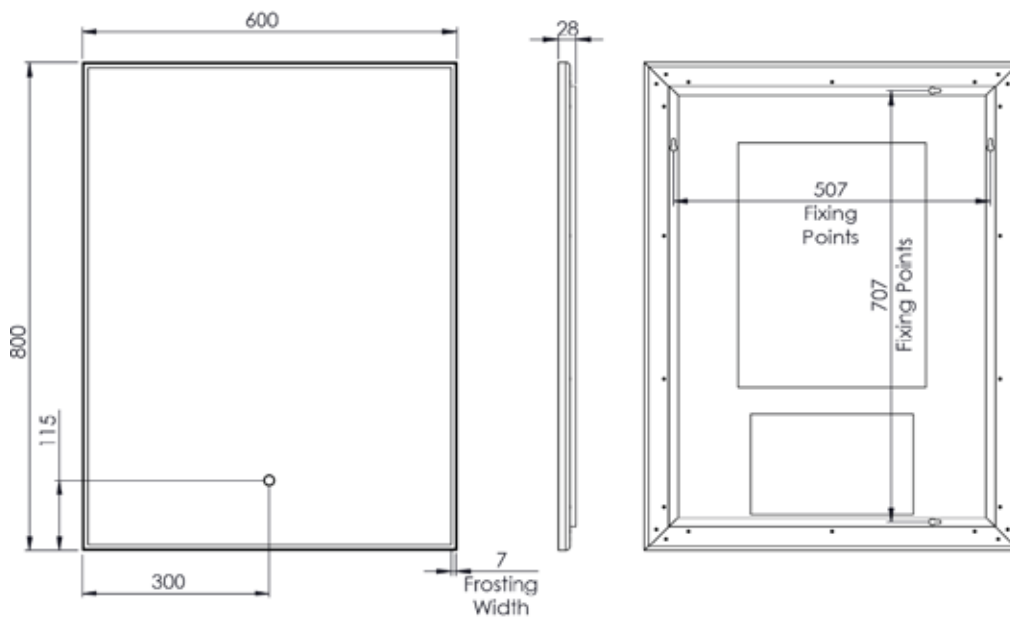

Milos LED Illuminated Mirror INST050131, INST050132

FAQs

	INST050131 (700x500mm)	INST050132 (800x600mm)
Can the mirror be hung landscape?	Yes	Yes
What is the thickness of the mirror glass?	5mm	5mm
Is the cabinet IP44 rated?	Yes – Suitable for use in bathroom zone 2	
What size fuse should I use?	Seek the advice of an electrician	
Where is the switch sensor located?	Lower Centre	Lower Right
Can the LED lighting be replaced?*	No	No
Can the switch sensor be replaced?	Yes	Yes
How do I turn on the demister pad?	The demister pad will turn on when the LEDs are turned on	
Are illuminated cabinets supplied with mains cable?	All illuminated mirrors are supplied with a removeable 500mm mains cable.	
Why are the lights not switching on?	Please note: After the mirror is connected to power for the first time, it may take up to 5 minutes for the sensor to calibrate and become fully responsive.	

*The LEDs are not replaceable to maintain the integrity of the product's resistance to moisture ingress.

Electrical Specification

	INST050131 (700x500mm)	INST050132 (800x600mm)
Input Voltage	220-240V 50Hz	220-240V 50Hz
Lamp Type	12V DC LED Lamp	12V DC LED Lamp
Total Wattage (LED + Demist)	37.1W	49.2W
Demist	13.5W	21.6W
Demist Size	250 x 300mm	300 x 400mm
LEDs	23.6W	27.6W
LED**	2592lm	3024lm
Energy Rating	F	F
CCT	3000–6500K	3000–6500K
CRI	80	80
IP Rating	IP44	IP44
Electrical Class	Class II	Class II

**The Lumen represents the output of the LED. This may vary depending on the diffuser material i.e., glass or acrylic.