

Rodos Aluminium Cabinet INST06018, INST06019



Specification

	INST06018 (Single Door)	INST06019 (Double Door)
Finish	Aluminium	Aluminium
Dimensions	650(h) x 510(w) x 135(d) mm	650(h) x 670(w) x 135(d) mm
Weight	9.2kg	11.6kg
Lighting Type	LED	LED
Colour Changing Technology (CCT)	No	No
Switch Location	Right side	Right side
Surface/Recess Fitting	Surface	Surface
Carcass/Frame Construction Material	Aluminium	Aluminium
Carcass/Frame Finish	Aluminium	Aluminium
Number of Internal Shelves	Two	Two
Shelves (Fixed/Adjustable)	Adjustable	Adjustable
Door Hinge Handing	Left hand	-
Glass Thickness	3mm	3mm

Features

Doors Soft close. Single door cabinet left hand hinged

FAQs

Please see following pages

Key Features + Benefits



Certifications + Accreditations


Roper Rhodes

Brassmill Lane Trading Estate, Bath, BA1 3JF. Technical Support – Tel: 01225 303 900 Email: sales@roperrhodes.co.uk


All information on the data sheet is correct at the time of publication. All measurements are approximate and subject to standard tolerances.

Rodos Aluminium Cabinet INST06018, INST06019

Single Door (INST06018)

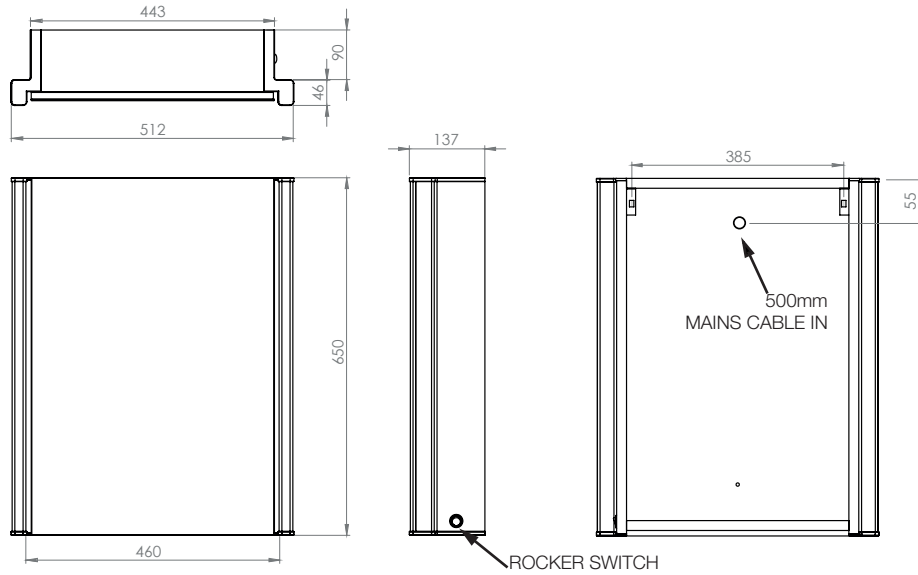

Double Door (INST06019)

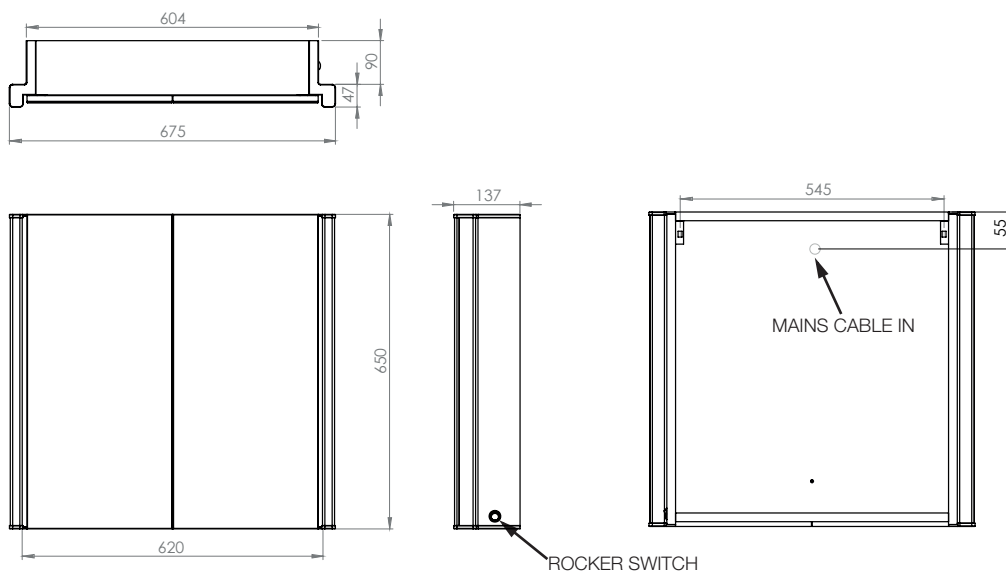

Roper Rhodes

Brassmill Lane Trading Estate, Bath, BA1 3JF. Technical Support – Tel: 01225 303 900 Email: sales@roperrhodes.co.uk

All information on the data sheet is correct at the time of publication. All measurements are approximate and subject to standard tolerances.

Rodos Aluminium Cabinet INST06018, INST06019

FAQs

	INST06018 (Single Door)	INST06019 (Double Door)
Internal Dimensions	100(h) x 105(w) mm	100(h) x 560(w) mm
Shelf dimensions	396(h) x 95(w) x 5(d) mm	555(h) x 95(w) x 5(d) mm
Max shelf spacing	Shelves adjustable in increments of 70mm, up to a maximum of 350mm.	
Distance between door hinges	400mm	400mm
Individual door dimensions	650(h) x 440(w) x 15(d) mm	650(h) x 302(w) x 15(d) mm
Max door opening angle	90°	90°
Max depth with door open	577mm	415mm
Hanging bracket centres	385mm	545mm
What is the thickness of the mirror glass?	3mm PVC back filmed (On 12mm MDF).	3mm PVC back filmed (On 12mm MDF).
Is the cabinet IP44 rated?	Yes, it can be placed in zone 2 and outside zones.	Yes, it can be placed in zone 2 and outside zones.
What size fuse should I use?	Seek the advice of an electrician	Seek the advice of an electrician
What is the total power consumption?	55W	55W
Does the cabinet have an energy rating?	Yes, It has an energy rating of – A	Yes, It has an energy rating of – A
What is the colour of the light and the Kelvin rating?	6000K	6000K
What is the Lumen of the LEDs?*	–	–
What is the wattage of the lights?	–	–
Where is the IR sensor/rocker switch located?	–	–
Where is the shaver socket located?	–	–
Can the LED lighting be replaced?	Yes, see on last page instruction packages available for this mirror.	
Can the IR sensor/rocker switch be repositioned?	No	No
What is the output of the demister pad?	–	–
What are the dimensions of the demister pad?	–	–
How do I turn on the demister pad?	–	–
Are illuminated cabinets supplied with mains cable?	All illuminated cabinets are supplied with a removeable 500mm mains cable. There is ample storage for excess cable in the back of the unit.	

*The Lumen represents the output of the LED. This may vary depending on the diffuser material i.e., glass or acrylic.