

## Technical Data Sheet | Thermostatic Radiator Valve (TRV)

www.instinctproducts.co.uk



### 10mm Angled Thermostatic Radiator Valve (Twin Pack) 10PACKAWHCP



#### Specification

|  |                           |
|--|---------------------------|
| Finish   | Chrome / White            |
| Dimensions   | 140(h) x 76(w) x 48(d) mm |
| Weight   | 0.438kg                   |
| Max Flow Temperature   | 110°C                     |
| Max. Working Pressure  | 10 Bar                    |
| Min. Regulation Calibration (Anti-Frost Position)                        | 7°C                       |
| Maximum Regulation Calibration (Position)                                | 30°C                      |
| Saving Condition (Position)  | 20°C                      |
| Max. Exercise Pressure   | 1000 KPa                  |
| Max. Differential Pressure (Direction of Delivery)                       | 100 KPa                   |
| Max. Differential Pressure (Direction of Return)                         | 60 KPa                    |
| Min. Nominal Flow Rate "qm N" (DP=0.1 Bar) angle-straight DN15           | 200-220 ltrs/h            |
| Min. Nominal Flow Rate "qm N" (DP=0.1 Bar) angled DN10                   | 210 ltrs/h                |
| Control Accuracy According to BS EN 215 - For Valves with Brass Cap Unit | 0.6 K                     |
| Hysteresis   | 0.3 K                     |
| Authority  | 0.9                       |
| Feedback   | 25 min                    |
| Differential Pressure Influence  | 0.2 K                     |
| Water Temperature Influence  | 1 K                       |
| Thermostatic Valve Supplied with Manual Regulating Wheel (Turning)       | 60°±1 K                   |

#### Energy

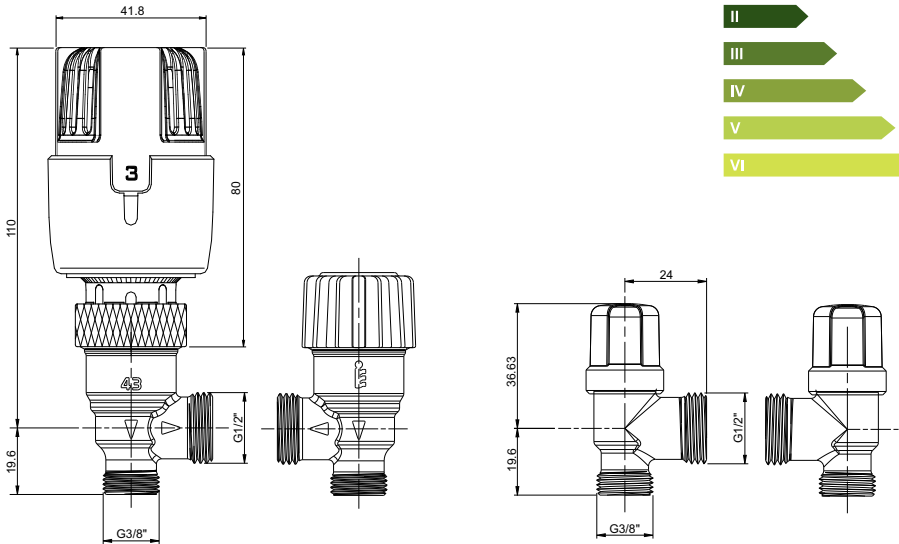

#### Key Features + Benefits

|                            |   |  |
|----------------------------|---|--|
| <b>1</b><br>Year Guarantee | <b>Max 110°C</b><br>Max. Flow Temperature | <b>Max 10 Bar</b><br>Max. Operating Pressure |
|----------------------------|---|--|

#### Standards

Keymark Approved BS EN 215:2019

#### Features

- Class I efficient thermostatic radiator valve
- Liquid filled sensor
- Control range 0 - 30°C
- Anti dirt trap minimalistic design
- Frost protection setting

#### Certifications + Accreditations



28