

## Technical Data Sheet | Thermostatic Radiator Valve (TRV)


www.instinctproducts.co.uk

### 15mm Angled Thermostatic Radiator Valve Lockshield (Twin Pack) 15PACKABS



#### Specification

Finish	Chrome / White
Dimensions	140(h) x 76(w) x 48(d) mm
Weight	0.45kg
Max Flow Temperature	110°C
Max. Working Pressure	10 Bar
Min. Regulation Calibration (Anti-Frost Position)	7°C
Maximum Regulation Calibration (Position)	30°C
Saving Condition (Position)	20°C
Max. Exercise Pressure	1000 KPa
Max. Differential Pressure (Direction of Delivery)	100 KPa
Max. Differential Pressure (Direction of Return)	60 KPa
Min. Nominal Flow Rate "qm N" (DP=0.1 Bar) angle-straight DN15	200-220 ltrs/h
Min. Nominal Flow Rate "qm N" (DP=0.1 Bar) angled DN10	210 ltrs/h
Control Accuracy According to BS EN 215 - For Valves with Brass Cap Unit	0.6 K
Hysteresis	0.3 K
Authority	0.9
Feedback	25 min
Differential Pressure Influence	0.2 K
Water Temperature Influence	1 K
Thermostatic Valve Supplied with Manual Regulating Wheel (Turning)	60°±1 K

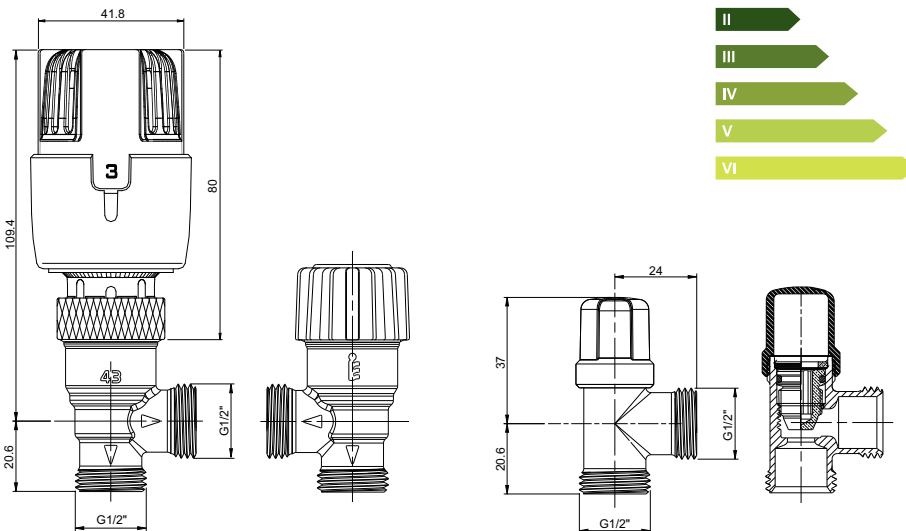

#### Key Features + Benefits

<b>1</b> Year Guarantee	<b>Max 110°C</b> Max. Flow Temperature	<b>Max 10 Bar</b> Max. Operating Pressure
----------------------------	---	--

#### Standards

Keymark Approved BS EN 215:2019

#### Features

- Class I efficient thermostatic radiator valve
- Liquid filled sensor
- Control range 0 - 30°C
- Anti dirt trap minimalistic design
- Frost protection setting

#### Certifications + Accreditations



28