

Vardi Single Lever Exposed Mini Valve + Kit INSVEV0001



Specification

| | |
|----------------------------------|-----------------------------|
| Finish | Chrome |
| Dimensions | ???(h) x ???(w) x ???(d) mm |
| Weight | ??kg |
| Body Material | Brass |
| Hose Material | Plastic + Stainless Steel |
| Hose Length | 1750mm |
| Hose Connection | Cone to Nut |
| Hose Bore | 8mm |
| Overhead | - |
| Overhead Material | - |
| Overhead Size | - |
| Shower Arm Length | - |
| Handset Material | ABS |
| Handset Functions | Three Function |
| Handset Rub Clean | Yes |
| Valve Inlet Centres | 110-155mm |
| Valve Connection | 15mm |
| Valve Handle Material | Zinc Alloy |
| Min Operating Pressure | 0.1 Bar |
| Max Operating Pressure | 5 Bar |
| Max Static Pressure | 10 Bar |
| Max Operating Temperature | 80°C |
| Thermostatic Safety Stop Setting | 43°C |
| Flow Restrictor | Yes |

Flow Rates


| Pressure | 0.2 | 0.5 | 1 | 3 |
|----------|-----|-----|-----|------|
| L/min | 2.7 | 5.3 | 7.9 | 15.2 |

All Pressures in Bar. All flow in L/Min. Dimensions supplied are nominal and subject to tolerance. Inclusion or restrictors (sold separately unless stated) will affect flow rate result. Performance details are based on trials under test conditions and for guidance only. The Company reserves the right to change product specification without prior notice.

Features

Compatibility: Suitable for use with unvented water supplies, combi boilers, gravity and mains pressure systems

Key Features + Benefits

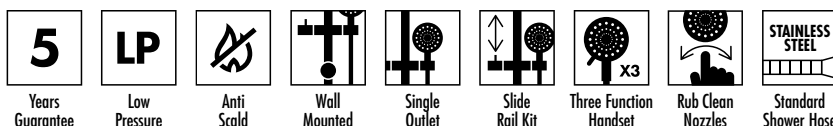

Certifications + Approvals

Flow Rate – 2.7 l/min



Tested at 0.2 Bar

Vardi Single Lever Exposed Mini Valve + Kit INSVEV0001

