

WC_Frame_INST13006_TDS_V1

 $1168(h) \times 500(w) \times 280(d) mm$

(for side or floor exit pipe runs)

Compatible with pneumatic flush plates & buttons (sold separately)

Brackets, fixings and 1st fix

Can only be mounted on the front of the cistern

Waste pipe can be routed out to the side of the frame with a

minimum distance of 170mm from wall to the front of the

Front access for easy maintenance and installation

If the frame is set at

Insulated polystyrene anti-condensation jacket

WRAS approved 6/3 Litre pneumatic flush valve

WRAS approved side entry ½" (female) inlet valve with

1170mm, the pan should be approximately 410mm above

protective covers included

Technical Data Sheet | WC Frames

www.instinctproducts.co.uk

Black

140-200mm

200mm

15.19kg

OEM

Yes

Νo


Dual

6 / 3L Side left

Air Ġap

Instinct 1170mm Wall Hung Frame + Cistern INST13006



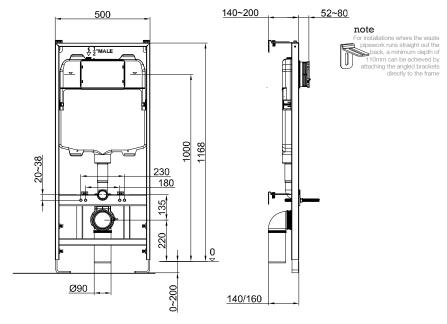

Min Operating Pressure	0.2 Bar
Max Operating Pressure	10 Bar
Features	
Compatibility	Compati flush pla (sold sep
Fixings	Brackets protectiv
Flush Plate Mounting	Can only
Waste Pipe Routing	Waste p to the sid minimum from wa frame
Maintenance	Front ac
Flush Valve	WRAS o
Inlet Valve	WRAS of ½" (female) Air Gap
Pan Installation Height	If the fra 1170mr approxing the floor
Insulation	Insulated

Specification Finish

Dimensions

Weight

Cistern Fitting

Manufacturer Airgap

Supplied

Flush Plate / Button

Flush (Single / Dual)

Flush (Max / Min)

Inlet Position (When looking at WC)

Adjustable Depth

Adjustable Leg Height

Certifications + Approvals

Key Features + Benefits









