

Stanza Bluetooth® LED Illuminated Mirror INST05062, INST05092



Specification

	INST05062 (Circular)	INST05092 (Rectangular)
Finish	White	White
Dimensions	600(diameter) mm	700(h) x 500(w) x 25(d) mm
Weight	5.3kg	6.9kg
Lighting Type	LED	LED
Colour Changing Technology (CCT)	No	No
Switch Location	Front	Front
Surface/Recess Fitting	Surface	Surface
Carcass/Frame Construction Material	Aluminium	Aluminium
Glass Thickness	5mm	5mm

Features




Technology	Bluetooth® connectivity in a super slim product
Lighting	LED illumination

FAQs

Please see following pages



Key Features + Benefits

5 Years Guarantee	2 Years Guarantee Electrical Components	IP44 IP44 Rated	LED LED Lighting	 Touch Controls	 Bluetooth® Technology	 Heated Demister Pad
-----------------------------	---	---------------------------	----------------------------	---	--	--

SLIM

Slim Depth

Certifications + Accreditations


Roper Rhodes

Brassmill Lane Trading Estate, Bath, BA1 3JF. Technical Support – Tel: 01225 303 900 Email: sales@roperrhodes.co.uk


All information on the data sheet is correct at the time of publication. All measurements are approximate and subject to standard tolerances.

Stanza Bluetooth® LED Illuminated Mirror INST05062, INST05092

Circular (INST05062)

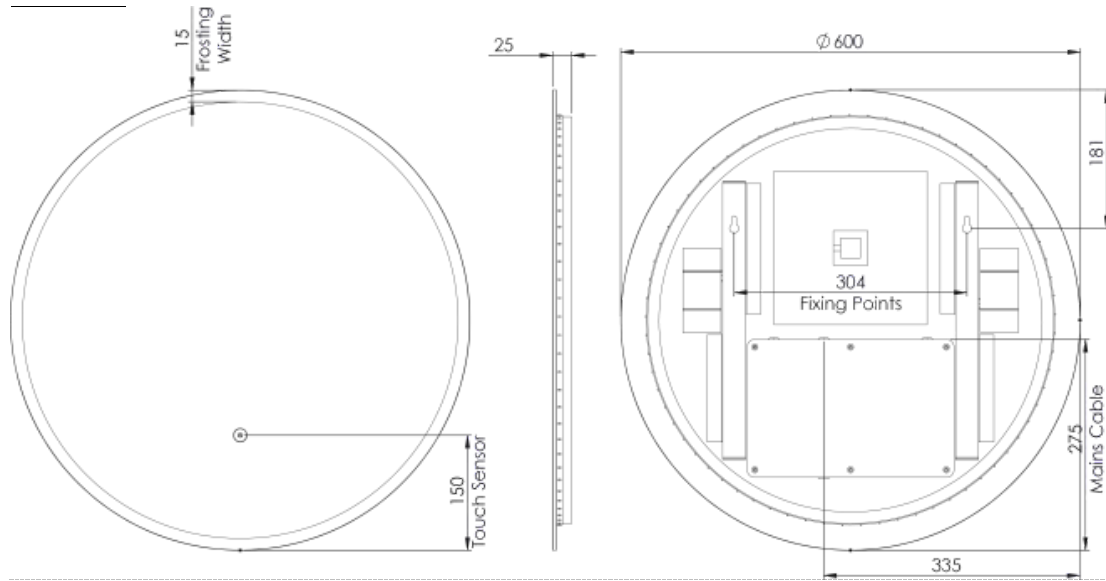

Rectangular (INST05092)

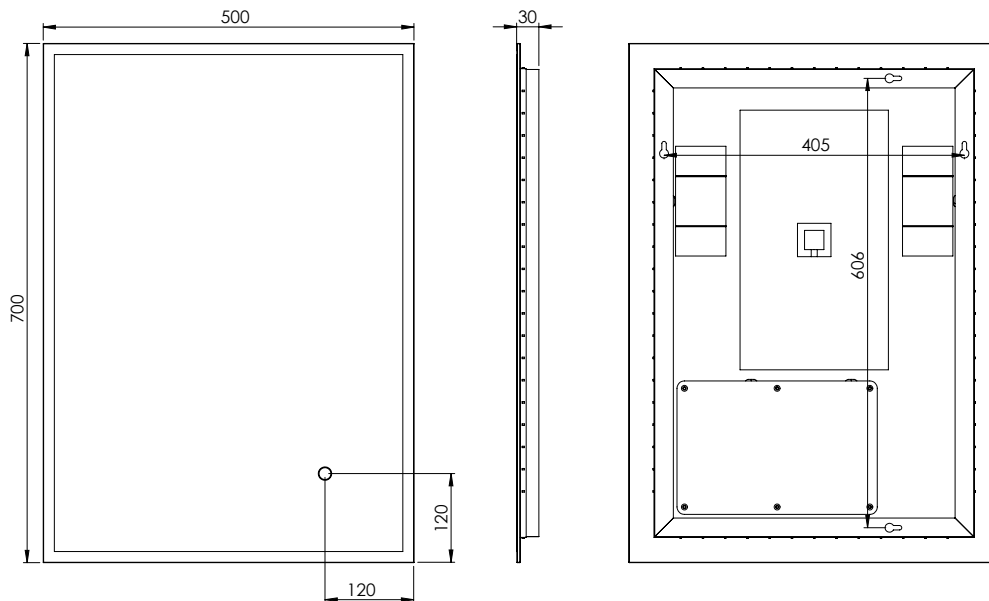

Roper Rhodes

Brassmill Lane Trading Estate, Bath, BA1 3JF. Technical Support – Tel: 01225 303 900 Email: sales@roperrhodes.co.uk

All information on the data sheet is correct at the time of publication. All measurements are approximate and subject to standard tolerances.

Stanza Bluetooth® LED Illuminated Mirror INST05062, INST05092

FAQs

	INST05062 (Circular)	INST05092 (Rectangular)
Can the mirror be hung landscape?	No	No
What is the thickness of the mirror glass?	5mm	5mm
Is the cabinet IP44 rated?	Yes – Suitable for use in bathroom zone 2	
What size fuse should I use?	Seek the advice of an electrician	
What is the total power consumption?	60W	??
Does the cabinet have an energy rating?	A	A
What is the colour of the light and the Kelvin rating?	6000K	??
What is the Lumen of the LEDs?*	–	–
What is the wattage of the lights?	24W	??
Where is the IR sensor/rocker switch located?	Front middle	??
Where is the shaver socket located?	Inside on the bottom right	??
Can the LED lighting be replaced?	No**	No**
Can the Touch sensor be replaced?	Yes	Yes
What is the output of the demister pad?	6W	??
What are the dimensions of the demister pad?	200(h) x 200(w) mm	200(h) x 400(w) mm
How do I turn on the demister pad?	The demister pad will turn on when the LEDs are turned on	
Are illuminated cabinets supplied with mains cable?	All illuminated mirrors are supplied with a removeable 500mm mains cable	
Bluetooth® Version	V5.0	V5.0
Bluetooth® Range	7–10m (Dependant on location of installation)	
Bluetooth® Control	Independent touch sensor for BT on/off. Use phone to change volume and tracks	
Bluetooth® Device Memory	The mirror can remember up to 4 devices. Only 1 device can be connected at a time	

*The Lumen represents the output of the LED. This may vary depending on the diffuser material i.e., glass or acrylic.

**The LEDs are not replaceable to maintain the integrity of the product's resistance to moisture ingress.